



ELECTRIC LOCKS

STRIKES & DEADBOLTS

ACCESS CONTROL



economical
electric door and gate locks
provide safety and security



fail-safe
to insure fire exit paths are
unlocked during power outages



automatic re-lock
adjustable from 0-5 seconds



stainless steel
bolt is 5/8" thick
with 5/8" throw

ELECTRIC STRIKES


- Suitable for most cylindrical door locks
- Easily retrofit into most door or gate frames
- Operate on 12-volt DC power
- Door strikes are available in both fail-safe and fail-secure models

ELECTRIC DEAD BOLTS

- Provide superior security and safety with fail-safe operation
- Operate on 12-volt DC power
- 5/8 inch stainless steel bolt with 5/8 inch throw

FEATURES

ACCESS CONTROL SOLUTIONS

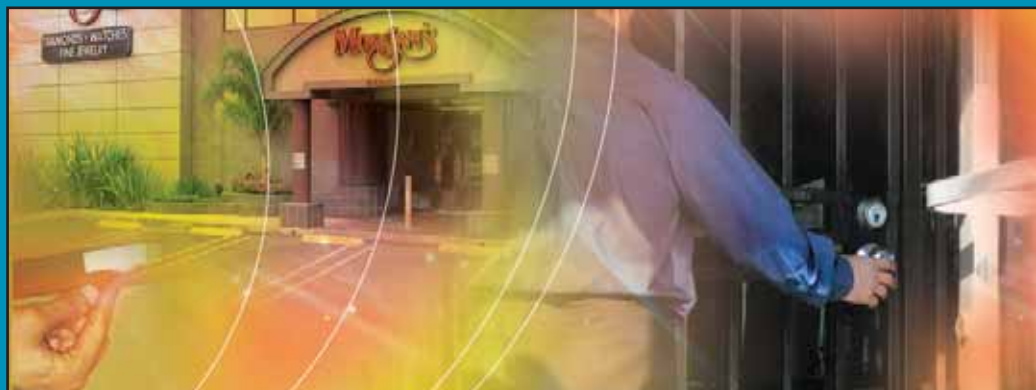




ELECTRIC LOCKS STRIKES & DEAD BOLTS


ELECTRIC STRIKES
offer an economical way to secure standard doors and are suitable for cylindrical locks with both fail-safe and fail-secure models available.

ELECTRIC DEAD BOLTS
provide superior security and safety and include fail-safe operation for doors or gates.

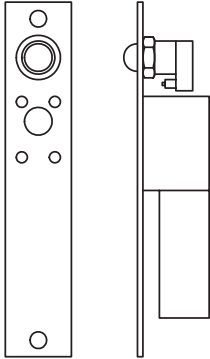


DKEB Deadbolt

1.5" W x 8" H x 1.875" D
38.1mm W x 203mm H x 47.6mm D



DKES-C2 Strike

1.875" W x 4.75" H x 1.5" D
47.6mm W x 120.6mm H x 38.1mm D



DKES-C1 Strike

1" W x 6.25" H x 1.25" D
25.4mm W x 158.7mm H x 31.7mm D

Strikes

Models *

dkes-C1-1FX, fail-secure 11/32 keeper
dkes-C1-1FS, fail-safe 11/32 keeper
dkes-C2-1FX, fail-secure 20/32 keeper
dkes-C2-1FS, fail-safe 20/32 keeper

Power

400 ma @ 12 VDC

* designed for indoor use only

Mounting

mortise

Styles

single doors

Advanced Features

Suitable for cylindrical locks with 11/32" (8.7mm) keeper (C1 series) or 20/32" (15.8mm) keeper (C2 series)

Shipping Weight

2 lbs (.9 kg)

Warranty

5 year limited warranty

Dead Bolts

Models *

dkeb-M-1, standard dead-bolt
dkeb-M-1L, with lock sensor
dkeb-M-1D, with door sensor
dkeb-M-1LD, with lock and door sensor

Power

Start: 900ma @ 12 VDC
Standby: 300ma @ 12 VDC

switch data/contact data

.5A @ 30 VDC/AC

* designed for indoor use only

Mounting

mortise

Styles

single doors

Advanced Features

Designed with built-in reverse polarity protection

Shipping Weight

2 lbs (.9 kg)

Warranty

5 year limited warranty

Distributed by:

DOORKING®, INC.

120 Glasgow Avenue, Inglewood, California 90301 U.S.A. Tel: 310-645-0023 FAX: 310-641-1586 www.doorking.com

© 2008 All Rights Reserved. Product specifications may change without notice. Rev. 8/08

MEMBER:

