


NIRPlus™


RETRO-REFLECTIVE PHOTOEYE

NIRPlus™ Retro-Reflective Photoeye

- Flexible Voltage:
12V AC/DC to 230V AC
28mA Current Draw Standby
15mA Current Draw Detect
- Watertight Package for Reliable
Outdoor Installation
- 6 Feet Cable
- 45 Feet Range
- Two LED Indicators
- Sensitivity Adjustment
- Compact Size: 2" High,
2" Deep, 0.70" Wide
- Relay Output: 3A 24V
1A 220V Normally Energized

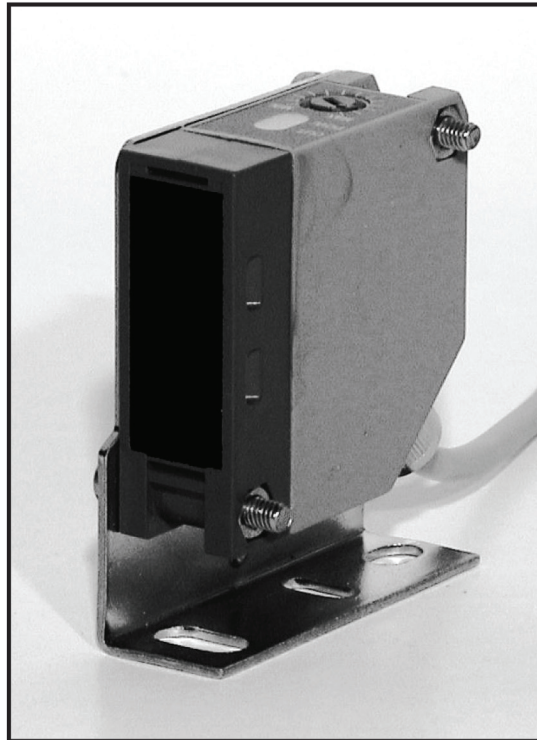


NIRPlus™

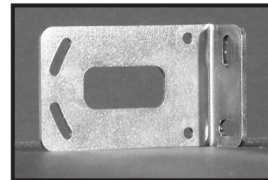

BRACKET


ACCESSORIES

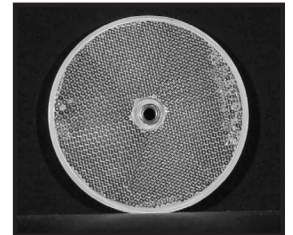

REFLECTOR



REFLECTOR HOOD

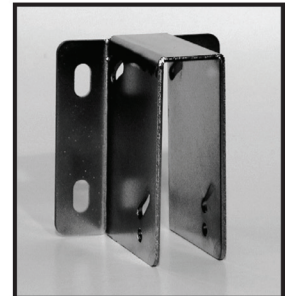

HOOD

FEATURES

RANGE The NIRPlus™ has an extended range of 45 feet providing better performance in rain and snow.

LOW CURRENT In addition, the low current draw of only 28mA makes the NIRPlus™ an excellent choice for solar and low voltage applications

PROTECTION The watertight package and an optional protective hood offers protection for the NIRPlus™ from the elements and vandalism.

RELIABILITY The output relay is normally energized, and should the NIRPlus™ photoeye lose power it will fail into detect mode.

INSTALLATION The installation hardware, bracket and instructions are included.

EMX
INDUSTRIES, INC.