



B. While standing near the back of the power unit, press the button on the transmitter you wish to use to operate the garage door. The lights will blink two times, then turn off. See Figure 5. Press this SAME button on the transmitter again. This will activate the door opener.

Fig. 5



C. The power unit must LEARN each transmitter separately. To code additional transmitters, simply repeat steps A and B. If you get confused or out of sequence, just wait 30 seconds. The light will turn off ending the LEARN mode and allowing you to start over. If you HOLD the LEARN button on the rear of the power unit for 10 seconds, the lights will blink six (6) times then turn off. ALL codes will be erased. See Figure 6.

Fig. 6

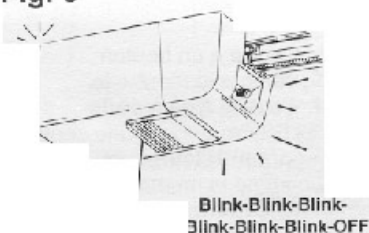


NOTE: If you program the second button on the SAME Secure Code transmitter to the SAME door opener by repeating steps A and B, it can be used to turn the power unit light ON and OFF as long as the door is not moving.

Digital Instructions:

If you have a Digital type of opener, use a pencil or pen to set the code switches in the transmitter in the identical positions (pattern) as the code switches on the rear of your power unit. See Figure 7. Replace access panel on transmitter.

The DOOR button will allow you to control your garage door opener, and the SECURE button will allow you to activate the Signal Block™ or Lightmaker™ features on your opener if these features are present. The Signal Block feature can only be activated if the door is fully closed.

Fig. 7

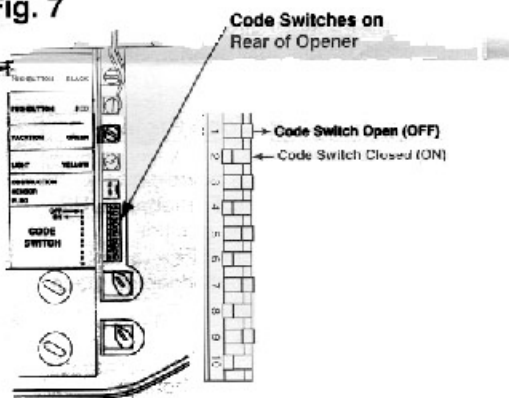

FCC Radio Usage Limitations

CAUTION: The garage door operator and all accessory radio equipment have been designed to Federal Communications Standards for Part 15 radio devices. Operation of this device is subject to the following conditions: (1) This device may not cause harmful interference; (2) This device must accept any interference that may be received, including interference that may cause undesired operation; (3) Changes or modifications not expressly approved by the manufacturer, could void the authority of users to operate this equipment.